

**supervac**<sup>®</sup>


intelligent vacuum packaging



GK 160/191/193

**Supervac  
GK 160 / GK 191 / GK 193  
Single Chamber Vacuum  
Packaging Machines**

- All stainless steel construction.
- On lockable casters.
- GK 160: Transparent lid.
- GK 191 / GK 193: Stainless steel lid.
- Digital control with 10 programmes.
- Waterproof to IP65.
- Vacuum sensor with steam point detection.
- Built-in vacuum pump with motor protection.
- Reliable and easy to service.
- Hygienic design – easy to clean.
- Easy to operate.

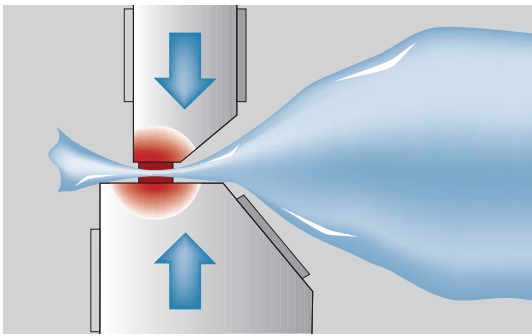

## GK 160 / GK 191 / GK 193 Compact and Reliable.

### Standard Features:

- Parallel sealing or Single sealing + Hot wire cut-off.
- 10 programmes.
- Vacuum sensor with steam point detection.


### Optional Features:

- Gas flushing.
- Individual control of Hot wire cut-off (GK 191 / GK 193 only).
- Biactive Sealing (GK 191 / GK 193 only).

The **Biactive Sealing** guarantees safe and reliable seals despite wrinkles, grease and moisture in the seal area.

### Technical data

	GK 160	GK 191	GK 193
Outside dimensions (L x W x H).....	735 x 815 x 1020 mm	935 x 1000 x 1140 mm	1135 x 1000 x 1140 mm
Chamber dimensions (L x W x H).....	500 x 520 x 220 mm	805 x 605 x 210 mm	1050 x 605 x 210 mm
Sealing bar length front + rear.....	X	2 x 820 mm	2 x 1020 mm
Sealing bar length left + right.....	2 x 520 mm	2 x 620 mm	2 x 620 mm
Sealing bar length front + right.....	X	780 x 520 mm	980 x 520 mm
Distance between seal bars front + rear.....	X	540 mm	540 mm
Distance between seal bars left + right.....	500 mm	745 mm	945 mm
Max. product length front + right.....	X	805 mm	1005 mm
Max. product height.....	220 mm	210 mm	210 mm
Built-in Busch vacuum pump.....	40 / 63 m <sup>3</sup> /h	100 / 160 m <sup>3</sup> /h	160 / 300 m <sup>3</sup> /h
Electricity consumption.....	1.9 / 2.3 kW	3.8 / 5.6 kW	5.6 / 9.1 kW
Weight approx.....	180 kg	260 kg	280 kg
Power supply.....	230V, 3Ph, 50Hz 400V, 3Ph, 50Hz	230V, 3Ph, 50Hz 400V, 3Ph, 50Hz	230V, 3Ph, 50Hz 400V, 3Ph, 50Hz

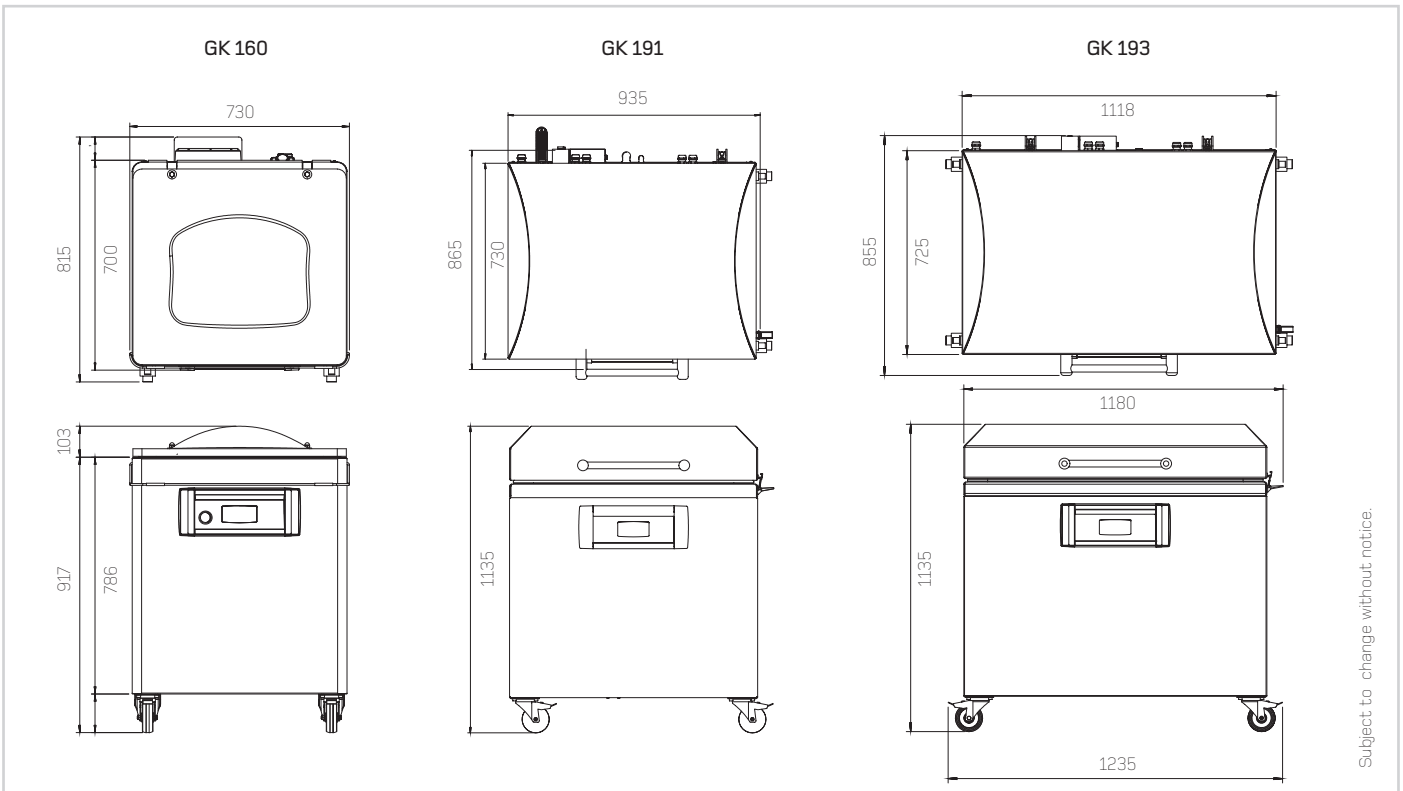

Subject to change without notice.

02/2016 | Supervac is a registered trademark of Supervac Maschinenbau GmbH.  
Copyright © 2016 Supervac Maschinenbau GmbH. All rights reserved.